

Turn your printer into a communicator



Contex IQ
"A" Grade Award
 Highly Recommended

New stand to fit even more large-format printers

- HP** ready
- Canon** ready
- EPSON** ready
- MUTOH** ready

Contex MFP2GO: Collaborate instantly with your project group

Contex MFP2GO is our easy plug-and-play solution for your large-format printer, when you need to scan, share and copy changes to plans and drawings. The solution connects easily to your printer, giving you a nice and small footprint, and fits your existing tools and business processes.

You can copy and scan to email, FTP, network, or USB – directly from the simple touch-screen solution.

You get outstanding image quality, with real-time view of enhancements and preset functionality for your daily scanning needs. The Contex MFP2GO bundle includes a scanner, MFP2GO controller, and a high stand.

No additional PC or software needed.




Turn your printer into a communicator

Key features

- User friendly and intuitive touch screen solution
- Preview, crop and adjust image settings
- Scan-to-copy, -email, -network, -FTP and USB
- SnapCrop: Easy image cropping (Contex patent)
- Import images directly to standard tablet platforms



For your best ergonomics, Contex MFP2GO offers the choice of operating the touch screen from left or right side.

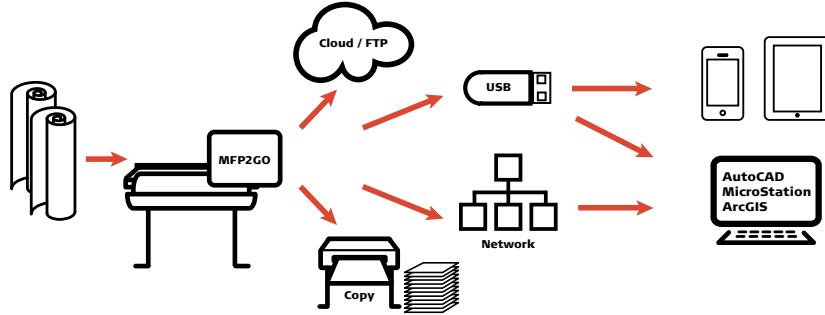

Contex IQ technology

Contex IQ scanners use the latest in High Quality CIS modules with Contex Dual Diffusion. This combined with xDTR, CFR and Sigma provides the best quality CIS scans in the market.

Our IQ models are designed for line drawings, maps and other technical documents.

Contex SD technology

The SD scanners' body is an extrusion from a single aluminium block. This unique and accurate design combined with xDTR, CFR and SIGMA ensures high quality CIS scanners.

Our SD models are designed for simple line drawings, maps and other technical documents.



The super intuitive touch screen controller comes with software for scan and copy.



	IQ 24 MFP2GO	IQ 44 MFP2GO	SD 36 MFP2GO
Supported HP printers USB or network	HP DesignJet 500 (HP-GL/2), 500PS (HP-GL/2), 510, 510PS, T120, T520, T610, T610ps, T620, T620ps, T770, T770ps, T790, T790ps, T1100, T1100ps, T1120, T1120ps, T1120mp, T1200, T1200ps, T1300, T1300ps, Z2100, Z2110, Z3100, Z3100ps, Z3200, Z3200ps, Z5200, Z5200ps, Z5400, Z6100, Z6100ps, Z6200, Z6200ps		
Supported HP printers network only	HP DesignJet T920, T1500, T2500		
Supported Canon printers USB or network	Canon W6200PG, W6400D, W6400PG, W7200, W8200, W8200PG, W8400D, W8400PG, IPF500, IPF600, IPF605, IPF650, IPF655, IPF700, IPF720, IPF750, IPF755, IPF810, IPF815, IPF820, IPF820 PRO, IPF825, IPF5000, IPF5100, IPF6100, IPF6200, IPF8100, IPF9000, IPF9100, IPF9000S, IPF9000S, IPF9000S, IPF6300, IPF6350, IPF6300, IPF6310, IPF6300S, IPF6300S, IPF6310S, IPF760, IPF765, IPF765, IPF6400, IPF6450, IPF8400, IPF9400, IPF9400S		
Supported Epson USB/network	Epson SC-T3000/5000/7000		
Supported Mutoh USB/network	Mutoh RJ900X, RJ901X, RJ900C and RJ901C		
Additional side-by-side printers ¹	HP DesignJet T7100, T7100ps, 4000, 4000PS, 4020, 4020PS, 4500, 4500PS, 4500mp, 4520, 4520PS, 4520mp, T2300, T2300ps		
Adjustable stand	Right or left side controller mounting. Height adjustable from 995 mm to 1115 mm in 25 mm increments (30.2 to 43.9 inches in about 1 inch increments)		
Scan Destinations	Copy / USB / Network / Email / FTP	Copy / USB / Network / Email / FTP	Copy / USB / Network / Email / FTP
File formats	TIF, JPG, PDF and CALS	TIF, JPG, PDF and CALS	TIF, JPG, PDF and CALS
Scanner Specifications (See remaining specifications for the scanner under the product series):			
200 dpi RGB Color speed	1.5 inch/sec	1.5 inch/sec	1.5 inch/sec
Upgradable ¹	Yes	Yes	Yes
200 dpi Grayscale / Monochrome	10.0 inch/sec	10.0 inch/sec	10.0 inch/sec
Maximum Scan Width	24 inch (610 mm)	44 inch (1118 mm)	36 inch (914 mm)
Maximum Media Width	26.6 inch (676 mm)	47 inch (1194 mm)	38 inch (965 mm)
Optical Resolution	1200 dpi	1200 dpi	600 dpi
Maximum Resolution	9600 dpi	9600 dpi	600 dpi
Technology	Contex Unibody CIS design	Contex Unibody CIS design	Contex Unibody CIS design
Contex SIGMA ²	-	•	•
Contex CFR ³	•	•	•
Maximum Media Thickness	0.08 inch (2 mm)	0.08 inch (2 mm)	0.08 inch (2 mm)
Accuracy	0.1% +/- 1 pixel	0.1% +/- 1 pixel	0.1% +/- 1 pixel
Data Capture (color/mono)	48-bit / 16-bit	48-bit / 16-bit	48-bit / 16-bit
Color Space	sRGB	sRGB	sRGB
Energy Star compliant	•	•	•
Power Requirements	110 - 240V, 60/50Hz, 18W	110 - 240V, 60/50Hz, 22W	110 - 240V, 60/50Hz, 25W
Weight	16.1 Kg (35.5 lbs)	27 kg (59.5 lbs)	21.1 kg (46.5 lbs)
Dimensions (LxWxH)	32.4 x 32.4 x 18.9 x 6.3 inches (82.4 x 82.4 x 48.0 x 16.1 cm)	53.1 x 18.9 x 6.3 inches (135.0 x 48.0 x 16.1 cm)	45.6 x 12.9 x 5.5 inches (115.9 x 32.7 x 14 cm)
Certifications/compliance	CE, cUL, VCCI, FCC Class A, RoHS and ENERGY STAR	CE, cUL, VCCI, FCC Class A, RoHS and ENERGY STAR	CE, cUL, Gost-R, KC, BSMI, VCCI, FCC Class A, RoHS and ENERGY STAR
Controller Specifications			
Processor	Intel Cedarview D2550 Dual Core 1.86G, L2 1M, 10W		
Memory / Storage	1 GB DDR3 RAM / 160 GB SATA		
OS	Windows 7 Embedded		
Scanning Software	Built-in scanning and copying software included		
Language versions	English, Chinese, Dutch, French, German, Italian, Japanese, Korean, Polish, Russia, Spanish and Portuguese		
Touch Screen	10.1" LED LCD, 1024x600 Pixels		
Connectivity	USB or Network Printer Support / USB Scanner Support / USB Disk Support / GB Ethernet		
Power Supply	65W / 19V		
Weight & Dimensions	3.3 lbs/1.5 kg, WxDxH: 10.4 x 1.5 x 6.7 inches (263 x 38 x 170 mm)		
Certifications/compliance	ENERGY STAR, RoHS, UL, CE, Gost-R, CCC, VCCI, KETI, BSMI, FCC: CLASS A		

¹ See Contex ScanStation2GO for optimal side-by-side solutions.
 Not all supported printers will fit under the high stand.
² Upgrading the scanner speed will not be supported by the Controller. For faster scanning speeds the scanner must be connected to a full PC with optional NextImage Software.
³ Signal Intensity Matching (SIGMA) is a Contex Patent. Sensor heating during a scan can cause inhomogeneous images. Thanks to Contex innovative thinking Contex IQ and SD scanners will minimize sensor differences LIVE during a scan.
⁴ Color Fringe Removal (CFR) is a Contex Patent. Color Fringing is a natural consequence of CIS technology sequentially flashing R-G-B. Thanks to Contex innovative thinking Contex IQ will remove this problem with advanced filter technology.
 All trademarks remain the property of their respective holders, and are used only to directly describe the product being provided. Their use in no way indicates any relationship between Contex and the holders of the said trademarks.



Contex Head Office

Phone: +45 4814 1122
 info@contex.com

Contex Americas

Virginia, USA
 Phone: +1 (703) 964 9850
 salesamericas@contex.com

Contex EMEA & India

Copenhagen, Denmark
 Phone: +45 4814 1122
 emea-india@contex.com

Contex Singapore

Phone: +65 6853 8129
 ap@contex.com

Contex China

Shanghai
 Phone: +86 21 6422 2525
 info-china@contex.com

Contex Japan

Yokohama
 Phone: +81 3 3669 5515
 info-japan@contex.com



Read more at contex.com